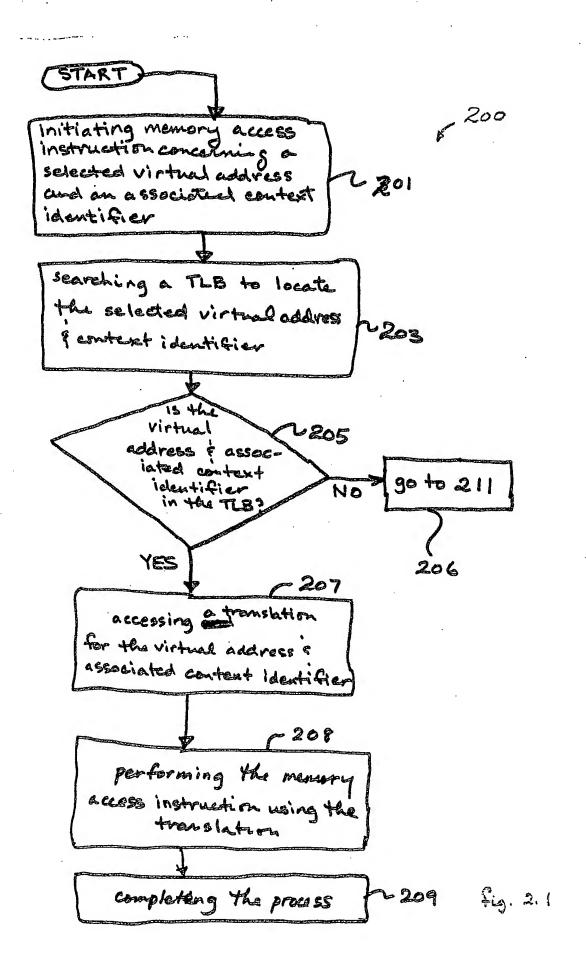
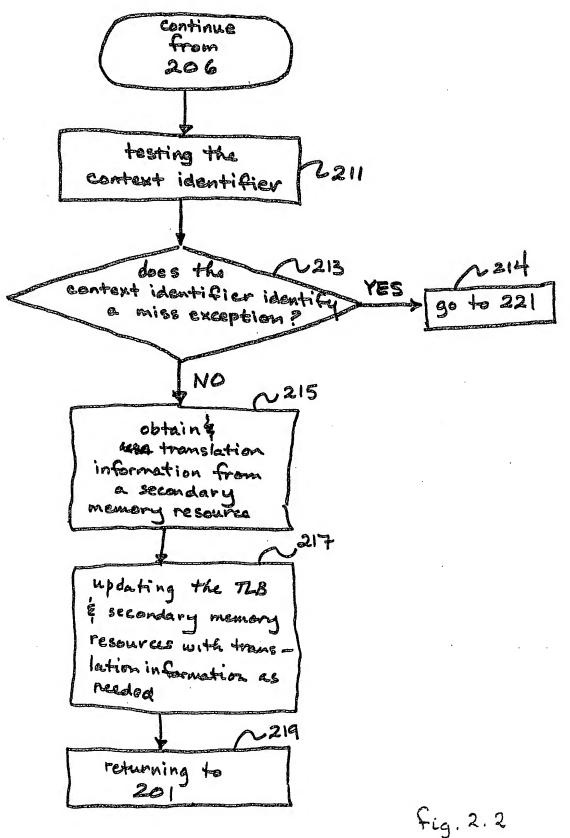


fig. 1





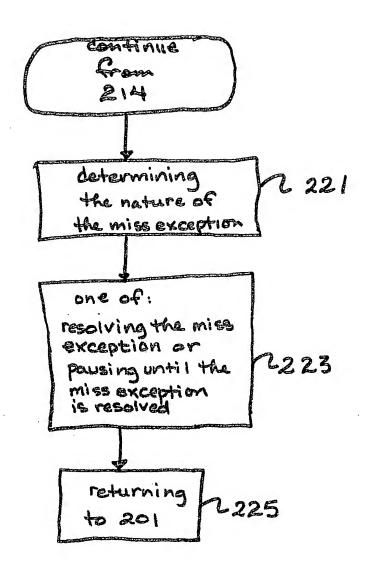
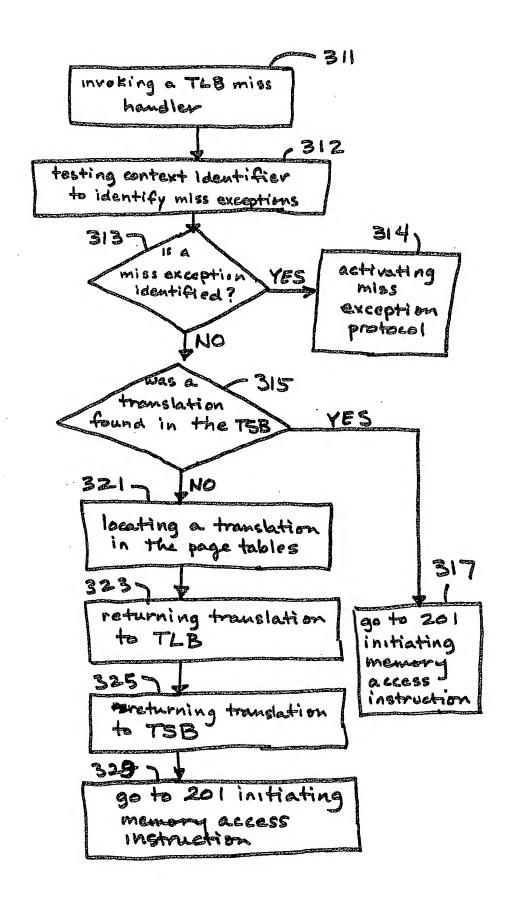
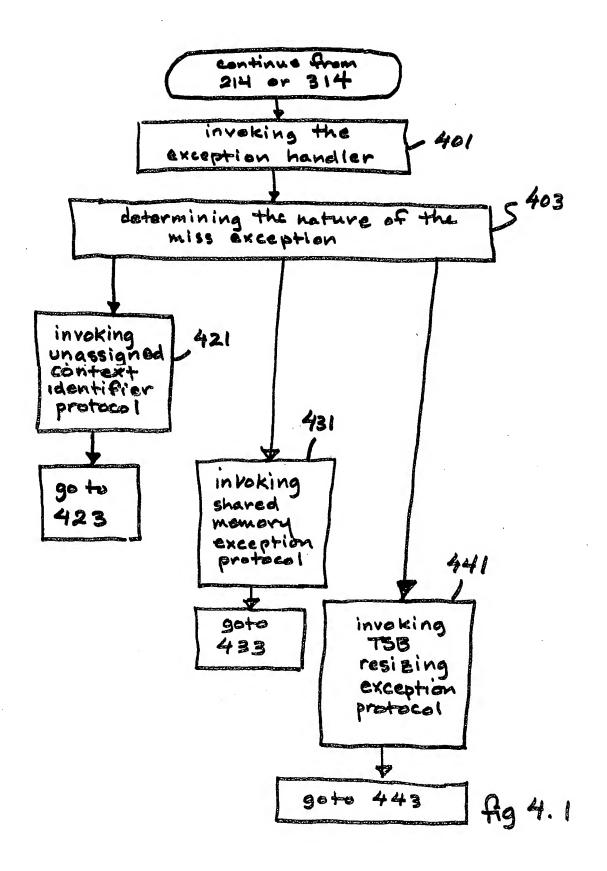


fig. 2.3

Fig. 3





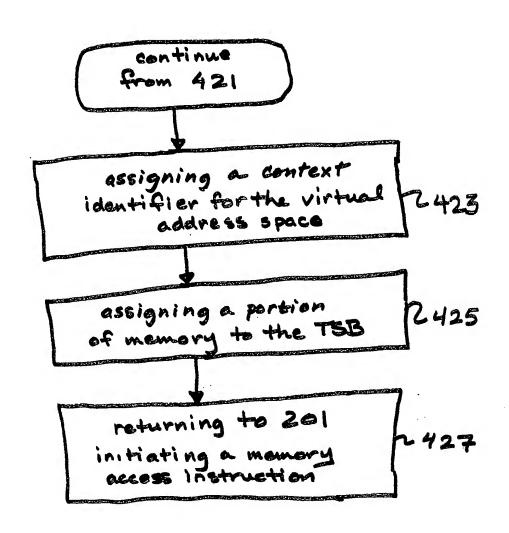


Fig. 4.2


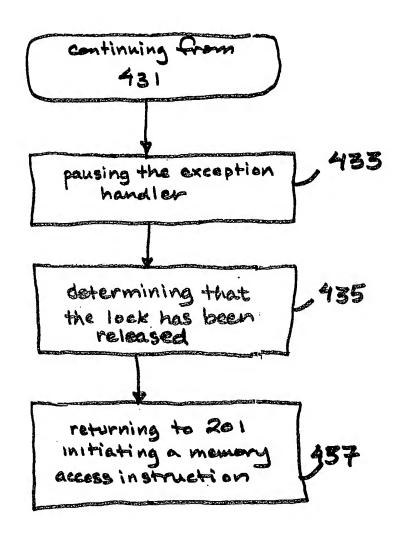


fig. 4.3

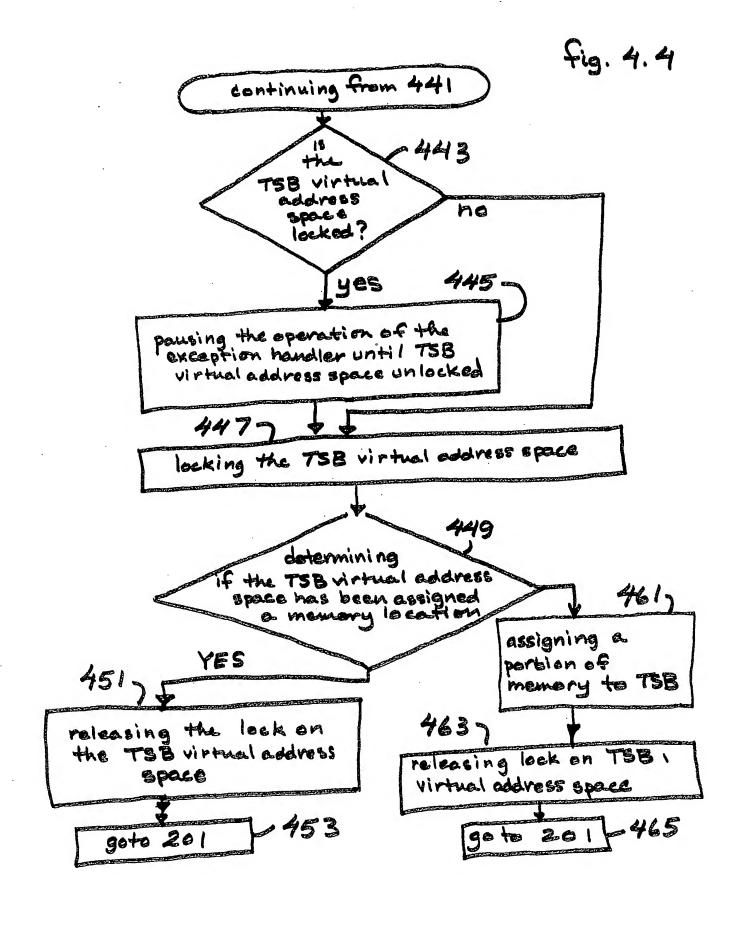

START 500 rectiving instruction to change a 501 shared memory resource identifying all virtual address spaces that share the shared 503 memory resource activating locks on the virtual address spaces changing context Identifiers of the affected virtual address spaces to indicate the Shaved memory resource is unavailable performing the instructed changes 509 to the shaved memory resource releasing the locks on the virtual 8 pa 603 address freeing the context identifiers for all affected virtual address spaces

Fig. 5

£ 600 START 601 recieving resigning instructions for a TSB virtual address 603 locking the TSB virtual address space changing the context identifier TSB wirthed address space to "unavailable" resizing the 609 releasing the lock changing the context identifier back to its original value

fig. 6

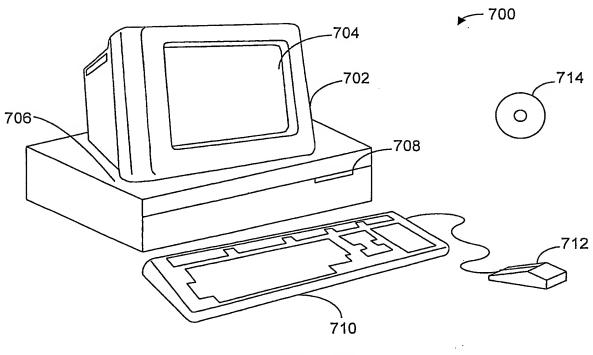


Fig. 7A

